Supplementary: Reconstructing Translucent Objects using Differentiable Rendering

XI DENG, Cornell University, USA
FUJUN LUAN, Adobe Research, USA
BRUCE WALTER, Cornell University, USA
KAVITA BALA, Cornell University, USA
STEVE MARSCHNER, Cornell University, USA

ACM Reference Format:
Xi Deng, Fujun Luan, Bruce Walter, Kavita Bala, and Steve Marschner. 2022. Supplementary: Reconstructing Translucent Objects using Differentiable Rendering. In *Special Interest Group on Computer Graphics and Interactive Techniques Conference Proceedings (SIGGRAPH '22 Conference Proceedings), August 7–11, 2022, Vancouver, BC, Canada.* ACM, New York, NY, USA, 2 pages. https://doi.org/10.1145/3528233.3530714

1 OBJECTIVE

We compare our unbias loss function with bias loss function (L2 Loss) at different sample per pixel per iteration.

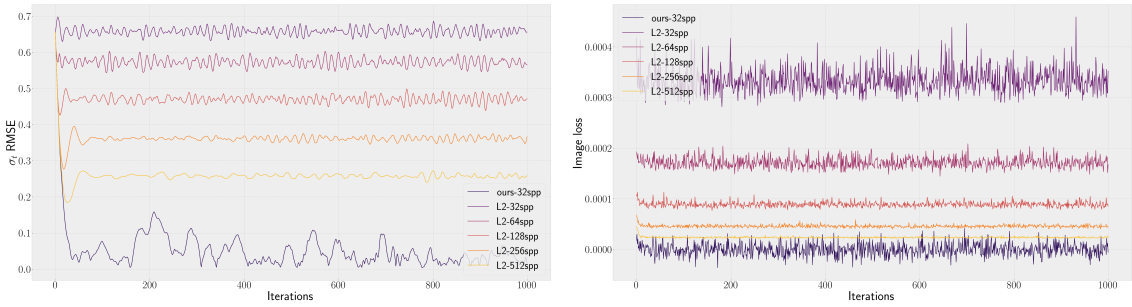

Fig. 1. Equal-sample comparison on inverse rendering of a translucent bunny by utilizing automatic differentiation directly on the L2 loss vs. our proposed dual-buffer loss. At every iteration, we render two 32spp buffers for computing our loss. For all iterations, we use a fix distribution to important sample the distance from, this makes it easier to analysis the variance of L2 loss. We render 32spp, 64spp, 128spp, 256spp and 512spp for L2 loss. As shown in the plot, optimizing with our loss (purple) converges to match the reference better in parameter error, compared to using L2 loss (yellow) which converges to a biased value. The bias of L2 loss optimization can be reduced by taking more sample to render per iteration.

2 RESULTS

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
© 2022 Copyright held by the owner/author(s). Publication rights licensed to ACM.
Manuscript submitted to ACM

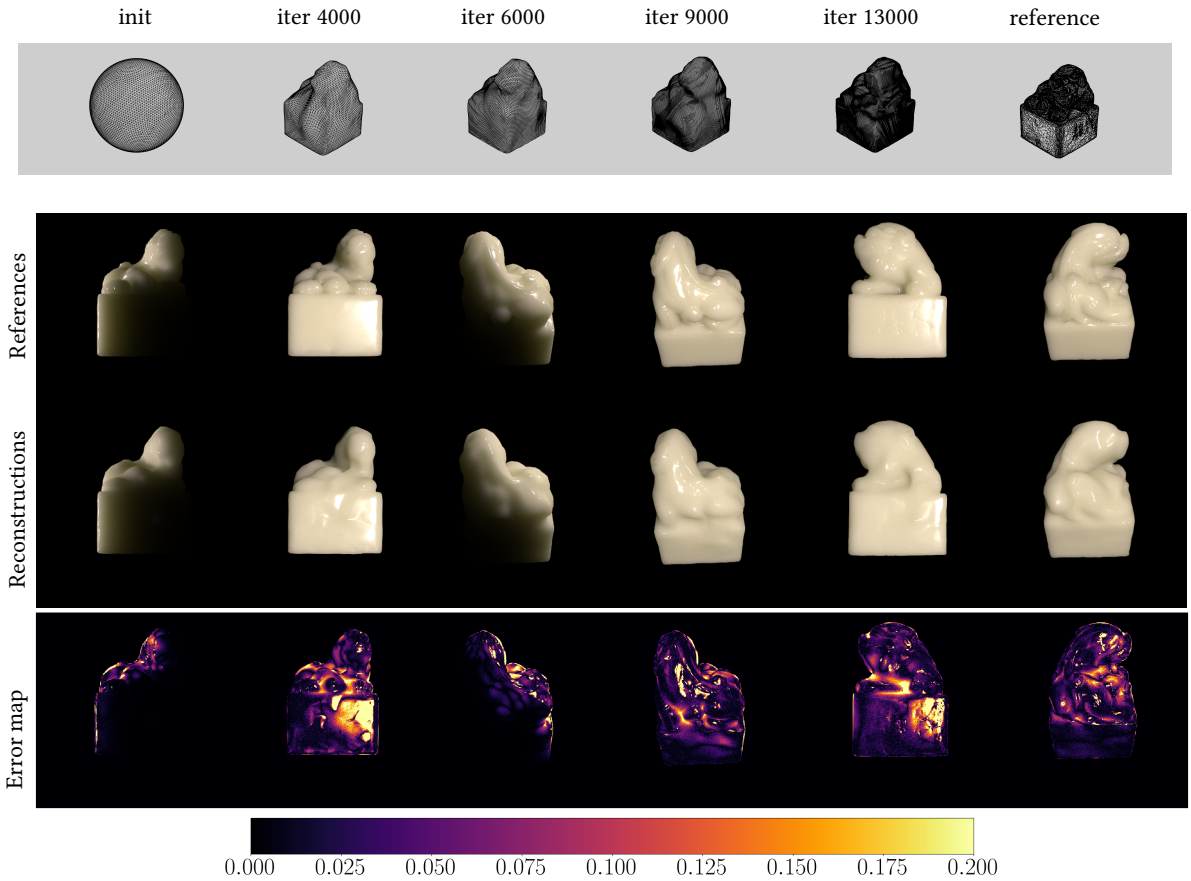

Fig. 2. Here we show a reconstruction of combined shape and homogeneous volume, of a jade seal. The reference are 48 synthetic renderings. We remeshed the shape 3 times along the optimization. We also used a silhouette loss for the shape optimization.